

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
19 July 2001 (19.07.2001)

PCT

(10) International Publication Number  
**WO 01/50941 A2**

- (51) International Patent Classification<sup>7</sup>: A61B
- (21) International Application Number: PCT/IL01/00020
- (22) International Filing Date: 10 January 2001 (10.01.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
134017 13 January 2000 (13.01.2000) IL
- (71) Applicant and  
(72) Inventor: REFAEL, Moshe [IL/IL]; 83 Eitanim str.,  
36001 Nofit (IL).
- (74) Agent: MILLER-SIERADZKI, ADVOCATES &  
PATENT ATTORNEYS; P.O.B. 6145, 31061 Haifa (IL).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,

DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,  
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,  
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,  
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,  
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,  
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— without international search report and to be republished  
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: ENCAPSULATED MEDICAL IMAGING DEVICE AND METHOD

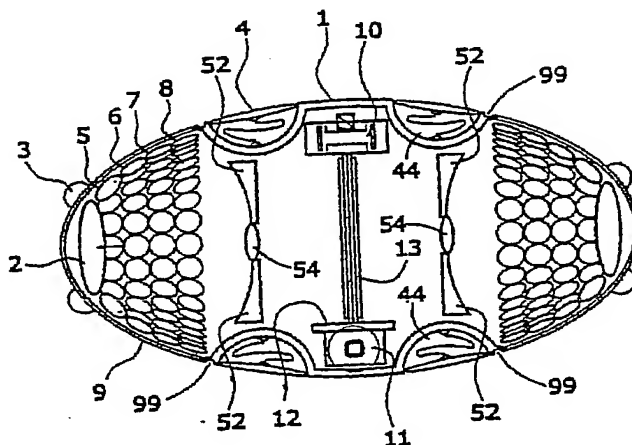

WO 01/50941 A2

(57) Abstract: An encapsulated medical imaging system is disclosed, comprising: a capsule of swallowable proportion comprising at least one optical setup of a number of optical setups comprising an array of microlenses distributed in axial symmetry on at least a portion of the capsule so that the array of microlenses is capable of receiving light reflected from object located in at least a sector outside the capsule; corresponding optical array comprising an array of light sensitive cells optically communicating with said optical setup through focusing means, such that the image of the object is focused on the array of light sensitive cells; electronic circuitry adapted to sample image data obtained by the optical array by scanning the image and converting the image data to digital data; illuminating means for illuminating a sector in front the optical setup, outside the capsule; transmitting means communicating with said electronic circuitry, adapted to receive image digital data and transmit it to an external receiver; receiving means for receiving data transmitted from said capsule; image processing means for processing the data received by the receiving means and; and display means for displaying an image.

## ENCAPSULATED MEDICAL IMAGING DEVICE AND METHOD

### FIELD OF THE INVENTION

The present invention relates to medical imaging. More particularly it  
5 relates to an encapsulated medical imaging device and method for imaging  
gastro intestinal tract in patients, using scanning technologies.

### BACKGROUND OF THE INVENTION

The gastrointestinal tract in adult humans is about 7-9 meters in total.  
10 Presently, of these 7-9 meters only as much as about 1.2 meters, extending  
from the ends of the gastrointestinal (GI) tract inwardly, may be imaged in  
commonly practiced medical imaging techniques (colonoscopy). Usually such  
imaging techniques involve inserting a tubular optical device (such as fiber  
optics) into the upper digestive system through the mouth (gastroscopy) or  
15 into the colon through the anus (colonoscopy) and advancing it along the  
gastrointestinal tract to inspect it and detect the presence of pathologies.

It may take years for a colon polyp to grow and turn malignant. In the  
absence of neurological warning system to indicate the occurrence of  
malignancies in their early stages it is often that the diagnosis of  
20 gastrointestinal malignancies is too late to be cured. Problems in the GI tract  
are ever too often detected only when they appear in great gravity and even  
then detection is made possible through the discovery of secondary  
indications (such as fecal occult blood occurrence). Early detection can be a  
major factor in improving the patient's chances of survival.

25 Some of the commonly occurring GI diseases include GI internal  
bleeding, inflammations of the GI tract, polyps, tapering of the GI tract,  
intestinal perforation, arteriovenous malformation. Internal bleeding may be

caused by ulcer or varicose veins. These diseases cannot be detected in X-ray imaging or other non-invasive imaging methods until they evolve to traumatic proportion, yet even when diagnosed it is difficult to point out their exact location if that happens to fall beyond the inspectable range.

5           GI tract cancers are considered major factor in older adults fatalities. Gastrointestinal malignancies are considered to be the 2<sup>nd</sup> highest factor in male fatalities, and 3<sup>rd</sup> highest factor in female fatalities. GI diseases may be classified with reference to their location in the GI tract and the distribution of these diseases was found to be as follows: 30 per cent occurring in the  
10   esophagus, stomach and duodenum, 10 per cent occurring in the small intestine and some 60 percent occurring in the large intestine.

The inability to image the small intestine may bring about the need to perform investigative abdomen incision, sometimes just for ruling out a vague suspicion of malignancy.

15           Although some 80 per cent of the GI diseases may supposedly be detected by colonoscopy or gastroscopy, sometimes these invasive techniques may be considered undesired. These techniques are relatively costly, requiring the presence of a several member medical team throughout the procedure. Furthermore it is statistically shown that about one in 2000  
20   patients is prone to perforation of the GI tract caused by a sharp object (the imaging tool) during the performance of the procedure. Such an incident immediately requires surgical intervention.

US 5,604,531 (Iddan et al.) entitled IN-VIVO VIDEO CAMERA SYSTEM, filed in 1995, and incorporated herein by reference, discloses an in-  
25   vivo video camera system and an autonomous video endoscope. The system includes a swallable capsule, a transmitter and a reception system. The swallable capsule includes a camera system and an optical system for imaging an area of interest onto the camera system. The transmitter transmits the output of the video camera system and the reception system receives the  
30   transmitted video output.

US 4,278,077 (Mitzumoto) entitled MEDICAL CAMERA SYSTEM, filed in 1979, and incorporated herein by reference, discloses a capsule-shaped miniature camera comprising at least one permanent magnet, an induction coil, a lamp serially connected to the induction coil and a shutter device. The  
5 induction coil induces an electromotive force when a magnetic field generated by electromagnets outside the camera acts on it. The electromotive force turns on the lamp and drives the shutter device.

The video camera system of the '531 patent (Iddan) employs analog video and analog transmission. It is evident that it provides an image focused  
10 at a predetermined fixed distance from the optical lens and consequently, due to the poor lighting conditions within the GI tract, blurred image of objects falling outside or falling short of the focal range. As the GI tract is composed of parts of different diameters (the esophagus, stomach, small and large intestines) it is anticipated that substantial information will be omitted or  
15 severely degraded in the image obtained by Iddan's system. Furthermore the inside walls of the GI tract are also present "hilly" topography, and therefore pose difficulties to the imaging abilities of that system.

It is noted that these prior art optical imaging devices are limited in their field of view as they include a single optical system and are therefore limited  
20 to one directional view. For irregular surfaces as exist in the GI tract this may result in many hidden areas that the imager will not view properly. Furthermore the possibility of the capsule flopping over or turning around is real and may hamper with the proper functionality of the device.

## 25 BRIEF DESCRIPTION OF THE INVENTION

It is therefore thus provided, in accordance with a preferred embodiment of the present invention, an encapsulated medical imaging system comprising:

a capsule of swallowable proportion comprising:

at least one optical setup of a number of optical setups comprising an array of microlenses distributed in axial symmetry on at least a portion of the capsule so that the array of microlenses is capable of receiving light reflected from object located in at least a sector outside the capsule;

corresponding optical array comprising an array of light sensitive cells optically communicating with said optical setup through focusing means, such that the image of the object is focused on the array of light sensitive cells;

electronic circuitry adapted to sample image data obtained by the optical array by scanning the image and converting the image data to digital data;

illuminating means for illuminating a sector in front the optical setup, outside the capsule;

transmitting means communicating with said electronic circuitry, adapted to receive image digital data and transmit it to an external receiver;

receiving means for receiving data transmitted from said capsule;

image processing means for processing the data received by the receiving means and; and

display means for displaying an image.

Furthermore, in accordance with another preferred embodiment of the present invention, the number of the optical setups comprises two optical setups, arranged in opposite sides of the capsule, so as to allow counter-directional viewing.

Furthermore, in accordance with another preferred embodiment of the present invention, the capsule is provided with at least one lens of a number of lenses for central view and wherein the array of microlenses is arranged in a coronal arrangement with respect to the lens, so as to provide peripheral  
5 view.

Furthermore, in accordance with another preferred embodiment of the present invention, the number of lenses comprises two lenses.

Furthermore, in accordance with another preferred embodiment of the present invention, the microlens array comprises a plurality of microlenses  
10 having different foci distributed in a known distribution, and wherein the processing means is adapted to identify and distinguish focused image data from unfocused one, disregard the unfocused data and acquire image made of focused data only.

Furthermore, in accordance with another preferred embodiment of the present invention, the illumination means comprises light emitting diodes.  
15

Furthermore, in accordance with another preferred embodiment of the present invention, the light emitting diodes illuminate light in different frequency ranges.

Furthermore, in accordance with another preferred embodiment of the present invention, the light emitting diodes emit red, green or blue light.  
20

Furthermore, in accordance with another preferred embodiment of the present invention, the light emitting diodes are operated so as to sequentially illuminate red green and blue light.

Furthermore, in accordance with another preferred embodiment of the present invention, the capsule is about 12-20 mm in length and about 5-7 mm in diameter.  
25

Furthermore, in accordance with another preferred embodiment of the present invention, the capsule housing is made from a biocompatible material.

Furthermore, in accordance with another preferred embodiment of the present invention, the capsule housing is made from a dissolvable material.

Furthermore, in accordance with another preferred embodiment of the present invention, the capsule housing is made from a dissolvable material  
5 that is durable enough so that it may pass an entire GI tract without disintegrating during the estimated period of time it would normally take for the capsule to pass through.

Furthermore, in accordance with another preferred embodiment of the present invention, the capsule is internally powered.

10 Furthermore, in accordance with another preferred embodiment of the present invention, the capsule is externally powered.

Furthermore, in accordance with another preferred embodiment of the present invention, the capsule is inductively powered.

Furthermore, in accordance with another preferred embodiment of the present invention, the capsule is further provided with supporting means for  
15 supporting the capsule and preventing its turning over or around.

Furthermore, in accordance with another preferred embodiment of the present invention, said supporting means comprise extractable surfaces.

Furthermore, in accordance with another preferred embodiment of the present invention, the extractable surfaces are supported by arms.  
20

Furthermore, in accordance with another preferred embodiment of the present invention, said arms are resilient.

Furthermore, in accordance with another preferred embodiment of the present invention, said arms are mechanically foldable.

Furthermore, in accordance with another preferred embodiment of the present invention, the arms are adapted to be housed in cavities provided in the housing of the capsule.

Furthermore, in accordance with another preferred embodiment of the present invention, the cavities are adapted to hold samples obtained by the arms.

Furthermore, in accordance with another preferred embodiment of the present invention, the capsule is further provided with a medical parameter sensor.

Furthermore, in accordance with another preferred embodiment of the present invention, the sensor comprises a temperature sensor or a pressure sensor.

Furthermore, in accordance with another preferred embodiment of the present invention, the capsule is further provided with wiping means for wiping dirt off the optical setup.

Furthermore, in accordance with another preferred embodiment of the present invention, the wiping means comprises a wiping arm.

Finally, in accordance with another preferred embodiment of the present invention, there is provided an encapsulated medical imaging system comprising:

a capsule of swallowable proportion comprising:

at least one optical setup of a number of optical setups comprising an array of multi-focal lenses distributed in axial symmetry on at least a portion of the capsule so that the array of multi-focal lenses is capable of receiving light reflected from object located in at least a sector outside the capsule;



- corresponding optical array comprising an array of light sensitive cells optically communicating with said optical setup through focusing means, such that the image of the object is focused on the array of light sensitive cells;
- 5 electronic circuitry adapted to sample image data obtained by the optical array by scanning the image and converting the image data to digital data;
- illuminating means for illuminating a sector in front the optical setup, outside the capsule;
- 10 transmitting means communicating with said electronic circuitry, adapted to receive image digital data and transmit it to an external receiver;
- receiving means for receiving data transmitted from said capsule;
- image processing means for processing the data received by the receiving means and; and
- 15 display means for displaying an image.

#### BRIEF DESCRIPTION OF THE FIGURES

In order to better understand the present invention, and appreciate its practical applications, the following Figures are provided and referenced hereafter. It should be noted that the Figures are given as examples only and in no way limit the scope of the invention as defined in the appending Claims. Like components are denoted by like reference numerals.

Figure 1a illustrates a patient's GI tract with an encapsulated medical imaging device in accordance with the present invention traveling through it.

Figure 1b illustrates a general view of an encapsulated medical imaging device in accordance with a preferred embodiment of the present invention.

5        Figure 2a illustrates the encapsulated medical imaging device of the present invention provided with arms, shown in semi-retracted state as it travels through a small intestine.

Figure 2b depicts the encapsulated medical imaging device of Fig. 2a with its arms fully deployed as it travels through a large intestine.

10        Figure 3a is a see-through view of a preferred embodiment of the encapsulated medical imaging device of the present invention.

Figure 3b depicts the optical scheme of the device of Fig. 3a.

Figure 4a illustrates a single stretched row of the microlens array of the device of Fig. 3a.

15        Figure 4b, illustrates fields of view of an encapsulated medical imaging device in accordance to the present invention as it travels through an intestine.

Figures 5a, 5b and 5c illustrate a display monitor communicating with a receiving unit of an encapsulated medical imaging device of the present invention incorporated in a vest worn by a patient.

20        Figure 6 illustrates a way to calculate the correct position of a suspected pathology detected by the encapsulated medical imaging device of the present invention.

Figure 7 illustrates an optional schematic configuration of the electronic system of an encapsulated medical imaging device in accordance with a preferred embodiment of the present invention.

25

DETAILED DESCRIPTION OF THE INVENTION AND FIGURES

A main aspect of the present invention is the provision of a multi-focal hemispherical-like array, capable of capturing focused images of various portions of the inspected objects located at different distances from the capsule.

Another main aspect of the present invention is the provision of optical array and the performance of scanning of the object rather than simply taking pictures frame-by-frame. The resolution of the image is determined by the number of pixels, which corresponds to the number of photosensors of a optical array utilized in the present invention. Scanning allows greater resolution to be attained in comparison with video imaging (as suggested in Iddan's '531 patent), obtaining segment-by-segment image of the viewed object.

The structure and mode of operation of the encapsulated medical imaging device of the present invention is herein explained with reference to the accompanying Figures.

Reference is made to Figure 1a, illustrating a patient's GI tract with an encapsulated medical imaging device in accordance with the present invention traveling through it. Initially the patient 30 is made to swallow the capsule 1. Capsule 1, having dimensions suitable for it to be taken orally and swallowed, after having been swallowed, immediately starts transmitting image data. It is traveling through the patient's GI tract 35, the GI tract generally comprising the esophagus 38, stomach 32, small intestine 34 and large intestine 36. The capsule is shown located at the small intestine 34 of the patient, traveling through it and transmitting information as it travels through. Typical anticipated dimensions for the capsule would be approximately 12 - 20 mm in length and about 5-7 mm in diameter. The capsule housing is made of bio-compatible non-toxic matter.

The encapsulated medical imaging device generally includes optical system, illumination system, optical array for obtaining digital representation of the image obtained by the optical system, electronic circuitry, and transmitting

5  
10  
15  
20  
25  
30  
35  
40  
45  
50  
55  
60  
65  
70  
75  
80  
85  
90  
95  
100  
105  
110  
115  
120  
125  
130  
135  
140  
145  
150  
155  
160  
165  
170  
175  
180  
185  
190  
195  
200  
205  
210  
215  
220  
225  
230  
235  
240  
245  
250  
255  
260  
265  
270  
275  
280  
285  
290  
295  
300  
305  
310  
315  
320  
325  
330  
335  
340  
345  
350  
355  
360  
365  
370  
375  
380  
385  
390  
395  
400  
405  
410  
415  
420  
425  
430  
435  
440  
445  
450  
455  
460  
465  
470  
475  
480  
485  
490  
495  
500  
505  
510  
515  
520  
525  
530  
535  
540  
545  
550  
555  
560  
565  
570  
575  
580  
585  
590  
595  
600  
605  
610  
615  
620  
625  
630  
635  
640  
645  
650  
655  
660  
665  
670  
675  
680  
685  
690  
695  
700  
705  
710  
715  
720  
725  
730  
735  
740  
745  
750  
755  
760  
765  
770  
775  
780  
785  
790  
795  
800  
805  
810  
815  
820  
825  
830  
835  
840  
845  
850  
855  
860  
865  
870  
875  
880  
885  
890  
895  
900  
905  
910  
915  
920  
925  
930  
935  
940  
945  
950  
955  
960  
965  
970  
975  
980  
985  
990  
995  
1000  
1005  
1010  
1015  
1020  
1025  
1030  
1035  
1040  
1045  
1050  
1055  
1060  
1065  
1070  
1075  
1080  
1085  
1090  
1095  
1100  
1105  
1110  
1115  
1120  
1125  
1130  
1135  
1140  
1145  
1150  
1155  
1160  
1165  
1170  
1175  
1180  
1185  
1190  
1195  
1200  
1205  
1210  
1215  
1220  
1225  
1230  
1235  
1240  
1245  
1250  
1255  
1260  
1265  
1270  
1275  
1280  
1285  
1290  
1295  
1300  
1305  
1310  
1315  
1320  
1325  
1330  
1335  
1340  
1345  
1350  
1355  
1360  
1365  
1370  
1375  
1380  
1385  
1390  
1395  
1400  
1405  
1410  
1415  
1420  
1425  
1430  
1435  
1440  
1445  
1450  
1455  
1460  
1465  
1470  
1475  
1480  
1485  
1490  
1495  
1500  
1505  
1510  
1515  
1520  
1525  
1530  
1535  
1540  
1545  
1550  
1555  
1560  
1565  
1570  
1575  
1580  
1585  
1590  
1595  
1600  
1605  
1610  
1615  
1620  
1625  
1630  
1635  
1640  
1645  
1650  
1655  
1660  
1665  
1670  
1675  
1680  
1685  
1690  
1695  
1700  
1705  
1710  
1715  
1720  
1725  
1730  
1735  
1740  
1745  
1750  
1755  
1760  
1765  
1770  
1775  
1780  
1785  
1790  
1795  
1800  
1805  
1810  
1815  
1820  
1825  
1830  
1835  
1840  
1845  
1850  
1855  
1860  
1865  
1870  
1875  
1880  
1885  
1890  
1895  
1900  
1905  
1910  
1915  
1920  
1925  
1930  
1935  
1940  
1945  
1950  
1955  
1960  
1965  
1970  
1975  
1980  
1985  
1990  
1995  
2000  
2005  
2010  
2015  
2020  
2025  
2030  
2035  
2040  
2045  
2050  
2055  
2060  
2065  
2070  
2075  
2080  
2085  
2090  
2095  
2100  
2105  
2110  
2115  
2120  
2125  
2130  
2135  
2140  
2145  
2150  
2155  
2160  
2165  
2170  
2175  
2180  
2185  
2190  
2195  
2200  
2205  
2210  
2215  
2220  
2225  
2230  
2235  
2240  
2245  
2250  
2255  
2260  
2265  
2270  
2275  
2280  
2285  
2290  
2295  
2300  
2305  
2310  
2315  
2320  
2325  
2330  
2335  
2340  
2345  
2350  
2355  
2360  
2365  
2370  
2375  
2380  
2385  
2390  
2395  
2400  
2405  
2410  
2415  
2420  
2425  
2430  
2435  
2440  
2445  
2450  
2455  
2460  
2465  
2470  
2475  
2480  
2485  
2490  
2495  
2500  
2505  
2510  
2515  
2520  
2525  
2530  
2535  
2540  
2545  
2550  
2555  
2560  
2565  
2570  
2575  
2580  
2585  
2590  
2595  
2600  
2605  
2610  
2615  
2620  
2625  
2630  
2635  
2640  
2645  
2650  
2655  
2660  
2665  
2670  
2675  
2680  
2685  
2690  
2695  
2700  
2705  
2710  
2715  
2720  
2725  
2730  
2735  
2740  
2745  
2750  
2755  
2760  
2765  
2770  
2775  
2780  
2785  
2790  
2795  
2800  
2805  
2810  
2815  
2820  
2825  
2830  
2835  
2840  
2845  
2850  
2855  
2860  
2865  
2870  
2875  
2880  
2885  
2890  
2895  
2900  
2905  
2910  
2915  
2920  
2925  
2930  
2935  
2940  
2945  
2950  
2955  
2960  
2965  
2970  
2975  
2980  
2985  
2990  
2995  
3000  
3005  
3010  
3015  
3020  
3025  
3030  
3035  
3040  
3045  
3050  
3055  
3060  
3065  
3070  
3075  
3080  
3085  
3090  
3095  
3100  
3105  
3110  
3115  
3120  
3125  
3130  
3135  
3140  
3145  
3150  
3155  
3160  
3165  
3170  
3175  
3180  
3185  
3190  
3195  
3200  
3205  
3210  
3215  
3220  
3225  
3230  
3235  
3240  
3245  
3250  
3255  
3260  
3265  
3270  
3275  
3280  
3285  
3290  
3295  
3300  
3305  
3310  
3315  
3320  
3325  
3330  
3335  
3340  
3345  
3350  
3355  
3360  
3365  
3370  
3375  
3380  
3385  
3390  
3395  
3400  
3405  
3410  
3415  
3420  
3425  
3430  
3435  
3440  
3445  
3450  
3455  
3460  
3465  
3470  
3475  
3480  
3485  
3490  
3495  
3500  
3505  
3510  
3515  
3520  
3525  
3530  
3535  
3540  
3545  
3550  
3555  
3560  
3565  
3570  
3575  
3580  
3585  
3590  
3595  
3600  
3605  
3610  
3615  
3620  
3625  
3630  
3635  
3640  
3645  
3650  
3655  
3660  
3665  
3670  
3675  
3680  
3685  
3690  
3695  
3700  
3705  
3710  
3715  
3720  
3725  
3730  
3735  
3740  
3745  
3750  
3755  
3760  
3765  
3770  
3775  
3780  
3785  
3790  
3795  
3800  
3805  
3810  
3815  
3820  
3825  
3830  
3835  
3840  
3845  
3850  
3855  
3860  
3865  
3870  
3875  
3880  
3885  
3890  
3895  
3900  
3905  
3910  
3915  
3920  
3925  
3930  
3935  
3940  
3945  
3950  
3955  
3960  
3965  
3970  
3975  
3980  
3985  
3990  
3995  
4000  
4005  
4010  
4015  
4020  
4025  
4030  
4035  
4040  
4045  
4050  
4055  
4060  
4065  
4070  
4075  
4080  
4085  
4090  
4095  
4100  
4105  
4110  
4115  
4120  
4125  
4130  
4135  
4140  
4145  
4150  
4155  
4160  
4165  
4170  
4175  
4180  
4185  
4190  
4195  
4200  
4205  
4210  
4215  
4220  
4225  
4230  
4235  
4240  
4245  
4250  
4255  
4260  
4265  
4270  
4275  
4280  
4285  
4290  
4295  
4300  
4305  
4310  
4315  
4320  
4325  
4330  
4335  
4340  
4345  
4350  
4355  
4360  
4365  
4370  
4375  
4380  
4385  
4390  
4395  
4400  
4405  
4410  
4415  
4420  
4425  
4430  
4435  
4440  
4445  
4450  
4455  
4460  
4465  
4470  
4475  
4480  
4485  
4490  
4495  
4500  
4505  
4510  
4515  
4520  
4525  
4530  
4535  
4540  
4545  
4550  
4555  
4560  
4565  
4570  
4575  
4580  
4585  
4590  
4595  
4600  
4605  
4610  
4615  
4620  
4625  
4630  
4635  
4640  
4645  
4650  
4655  
4660  
4665  
4670  
4675  
4680  
4685  
4690  
4695  
4700  
4705  
4710  
4715  
4720  
4725  
4730  
4735  
4740  
4745  
4750  
4755  
4760  
4765  
4770  
4775  
4780  
4785  
4790  
4795  
4800  
4805  
4810  
4815  
4820  
4825  
4830  
4835  
4840  
4845  
4850  
4855  
4860  
4865  
4870  
4875  
4880  
4885  
4890  
4895  
4900  
4905  
4910  
4915  
4920  
4925  
4930  
4935  
4940  
4945  
4950  
4955  
4960  
4965  
4970  
4975  
4980  
4985  
4990  
4995  
5000  
5005  
5010  
5015  
5020  
5025  
5030  
5035  
5040  
5045  
5050  
5055  
5060  
5065  
5070  
5075  
5080  
5085  
5090  
5095  
5100  
5105  
5110  
5115  
5120  
5125  
5130  
5135  
5140  
5145  
5150  
5155  
5160  
5165  
5170  
5175  
5180  
5185  
5190  
5195  
5200  
5205  
5210  
5215  
5220  
5225  
5230  
5235  
5240  
5245  
5250  
5255  
5260  
5265  
5270  
5275  
5280  
5285  
5290  
5295  
5300  
5305  
5310  
5315  
5320  
5325  
5330  
5335  
5340  
5345  
5350  
5355  
5360  
5365  
5370  
5375  
5380  
5385  
5390  
5395  
5400  
5405  
5410  
5415  
5420  
5425  
5430  
5435  
5440  
5445  
5450  
5455  
5460  
5465  
5470  
5475  
5480  
5485  
5490  
5495  
5500  
5505  
5510  
5515  
5520  
5525  
5530  
5535  
5540  
5545  
5550  
5555  
5560  
5565  
5570  
5575  
5580  
5585  
5590  
5595  
5600  
5605  
5610  
5615  
5620  
5625  
5630  
5635  
5640  
5645  
5650  
5655  
5660  
5665  
5670  
5675  
5680  
5685  
5690  
5695  
5700  
5705  
5710  
5715  
5720  
5725  
5730  
5735  
5740  
5745  
5750  
5755  
5760  
5765  
5770  
5775  
5780  
5785  
5790  
5795  
5800  
5805  
5810  
5815  
5820  
5825  
5830  
5835  
5840  
5845  
5850  
5855  
5860  
5865  
5870  
5875  
5880  
5885  
5890  
5895  
5900  
5905  
5910  
5915  
5920  
5925  
5930  
5935  
5940  
5945  
5950  
5955  
5960  
5965  
5970  
5975  
5980  
5985  
5990  
5995  
6000  
6005  
6010  
6015  
6020  
6025  
6030  
6035  
6040  
6045  
6050  
6055  
6060  
6065  
6070  
6075  
6080  
6085  
6090  
6095  
6100  
6105  
6110  
6115  
6120  
6125  
6130  
6135  
6140  
6145  
6150  
6155  
6160  
6165  
6170  
6175  
6180  
6185  
6190  
6195  
6200  
6205  
6210  
6215  
6220  
6225  
6230  
6235  
6240  
6245  
6250  
6255  
6260  
6265  
6270  
6275  
6280  
6285  
6290  
6295  
6300  
6305  
6310  
6315  
6320  
6325  
6330  
6335  
6340  
6345  
6350  
6355  
6360  
6365  
6370  
6375  
6380  
6385  
6390  
6395  
6400  
6405  
6410  
6415  
6420  
6425  
6430  
6435  
6440  
6445  
6450  
6455  
6460  
6465  
6470  
6475  
6480  
6485  
6490  
6495  
6500  
6505  
6510  
6515  
6520  
6525  
6530  
6535  
6540  
6545  
6550  
6555  
6560  
6565  
6570  
6575  
6580  
6585  
6590  
6595  
6600  
6605  
6610  
6615  
6620  
6625  
6630  
6635  
6640  
6645  
6650  
6655  
6660  
6665  
6670  
6675  
6680  
6685  
6690  
6695  
6700  
6705  
6710  
6715  
6720  
6725  
6730  
6735  
6740  
6745  
6750  
6755  
6760  
6765  
6770  
6775  
6780  
6785  
6790  
6795  
6800  
6805  
6810  
6815  
6820  
6825  
6830  
6835  
6840  
6845  
6850  
6855  
6860  
6865  
6870  
6875  
6880  
6885  
6890  
6895  
6900  
6905  
6910  
6915  
6920  
6925  
6930  
6935  
6940  
6945  
6950  
6955  
6960  
6965  
6970  
6975  
6980  
6985  
6990  
6995  
7000  
7005  
7010  
7015  
7020  
7025  
7030  
7035  
7040  
7045  
7050  
7055  
7060  
7065  
7070  
7075  
7080  
7085  
7090  
7095  
7100  
7105  
7110  
7115  
7120  
7125  
7130  
7135  
7140  
7145  
7150  
7155  
7160  
7165  
7170  
7175  
7180  
7185  
7190  
7195  
7200  
7205  
7210  
7215  
7220  
7225  
7230  
7235  
7240  
7245  
7250  
7255  
7260  
7265  
7270  
7275  
7280  
7285  
7290  
7295  
7300  
7305  
7310  
7315  
7320  
7325  
7330  
7335  
7340  
7345  
7350  
7355  
7360  
7365  
7370  
7375  
7380  
7385  
7390  
7395  
7400  
7405  
7410  
7415  
7420  
7425  
7430  
7435  
7440  
7445  
7450  
7455  
7460  
7465  
7470  
7475  
7480  
7485  
7490  
7495  
7500  
7505  
7510  
7515  
7520  
7525  
7530  
7535  
7540  
7545  
7550  
7555  
7560  
7565  
7570  
7575  
7580  
7585  
7590  
7595  
7600  
7605  
7610  
7615  
7620  
7625  
7630  
7635  
7640  
7645  
7650  
7655  
7660  
7665  
7670  
7675  
7680  
7685  
7690  
7695  
7700  
7705  
7710  
7715  
7720  
7725  
7730  
7735  
7740  
7745  
7750  
7755  
7760  
7765  
7770  
7775  
7780  
7785  
7790  
7795  
7800  
7805  
7810  
7815  
7820  
7825  
7830  
7835  
7840  
7845  
7850  
7855  
7860  
7865  
7870  
7875  
7880  
7885  
7890  
7895  
7900  
7905  
7910  
7915  
7920  
7925  
7930  
7935  
7940  
7945  
7950  
7955  
7960  
7965  
7970  
7975  
7980  
7985  
7990  
7995  
8000  
8005  
8010  
8015  
8020  
8025  
8030  
8035  
8040  
8045  
8050  
8055  
8060  
8065  
8070  
8075  
8080  
8085  
8090  
8095  
8100  
8105  
8110  
8115  
8120  
8125  
8130  
8135  
8140  
8145  
8150  
8155  
8160  
8165  
8170  
8175  
8180  
8185  
8190  
8195  
8200  
8205  
8210  
8215  
8220  
8225  
8230  
8235  
8240  
8245  
8250  
8255  
8260  
8265  
8270  
8275  
8280  
8285  
8290  
8295  
8300  
8305  
8310  
8315  
8320  
8325  
8330  
8335  
8340  
8345  
8350  
8355  
8360  
8365  
8370  
8375  
8380  
8385  
8390  
8395  
8400  
8405  
8410  
8415  
8420  
8425  
8430  
8435  
8440  
8445  
8450  
8455  
8460  
8465  
8470  
8475  
8480  
8485  
8490  
8495  
8500  
8505  
8510  
8515  
8520  
8525  
8530  
8535  
8540  
8545  
8550  
8555  
8560  
8565  
8570  
8575  
8580  
8585  
8590  
8595  
8600  
8605  
8610  
8615  
8620  
8625  
8630  
8635  
8640  
8645  
8650  
8655  
8660  
8665  
8670  
8675  
8680  
8685  
8690  
8695  
8700  
8705  
8710  
8715  
8720  
8725  
8730  
8735  
8740  
8745  
8750  
8755  
8760  
8765  
8770  
8775  
8780  
8785  
8790  
8795  
8800  
8805  
8810  
8815  
8820  
8825  
8830  
8835  
8840  
8845  
8850  
8855  
8860  
8865  
8870  
8875  
8880  
8885  
8890  
8895  
8900  
8905  
8910  
8915  
8920  
8925  
8930  
8935  
8940  
8945  
8950  
8955  
8960  
8965  
8970  
8975  
8980  
8985  
8990  
8995  
9000  
9005  
9010  
9015  
9020  
9025  
9030  
9035  
9040  
9045  
9050  
9055  
9060  
9065  
9070  
9075  
9080  
9085  
9090  
9095  
9100  
9105  
9110  
9115  
9120  
9125  
9130  
9135  
9140  
9145  
9150  
9155  
9160  
9165  
9170  
9175  
9180  
9185  
9190  
9195  
9200  
9205  
9210  
9215  
9220  
9225  
9230  
9235  
9240  
9245  
9250  
9255  
9260  
9265  
9270  
9275  
9280  
9285  
9290  
9295  
9300  
9305  
9310  
9315  
9320  
9325  
9330  
9335  
9340  
9345  
9350  
9355  
9360  
9365  
9370  
9375  
9380  
9385  
9390  
9395  
9400  
9405  
9410  
9415  
9420  
9425  
9430  
9435  
9440  
9445  
9450  
9455  
9460  
9465  
9470  
9475  
9480  
9485  
9490  
9495  
9500  
9505  
9510  
9515  
9520  
9525  
9530  
9535  
9540  
9545  
9550  
9555  
9560  
9565  
9570  
9575  
9580  
9585  
9590  
9595  
9600  
9605  
9610  
9615  
9620  
9625  
9630  
9635  
9640  
9645  
9650  
9655  
9660  
9665  
9670  
9675  
9680  
9685  
9690  
9695  
9700  
9705  
9710  
9715  
9720  
9725  
9730  
9735  
9740  
9745  
9750  
9755  
9760  
9765  
9770  
9775  
9780  
9785  
9790  
9795  
9800  
9805  
9810  
9815  
9820  
9825  
9830  
9835  
9840  
9845  
9850  
9855  
9860  
9865  
9870  
9875  
9880  
9885  
9890  
9895  
9900  
9905  
9910  
9915  
9920  
9925  
9930

means. The electronic circuitry is externally powered or it may contain an internal power source.

The capsule advances through the GI tract due to the normal intestinal action (contraction and relaxation of the GI tract muscular tissue). Due to its  
5 small size the capsule leaves the body with the excrement anally.

In a preferred embodiment of the present invention the housing of the capsule is made of dissolvable material (such as the material used for producing medication capsules), so that in the event of pathological narrowing of the intestines the capsule will not be stuck there. Naturally such material  
10 should be made durable enough so that it may pass the entire GI tract without disintegrating during the estimated period of time it would normally take for the capsule to pass through.

As it may be possible for the capsule to roll over and turn around when it advances through the GI tract the capsule is provided with dual optics so  
15 that in fact it includes two viewing means oppositely directed. This feature is also important when the view of the front viewing optics is locally obstructed by a protrusion on the surface rising from the intestine wall (like a polyp).

The system is supplemented by external receiving unit for receiving the data transmitted from the capsule, and a control unit for processing said data  
20 and displaying the images obtained.

Figure 1b illustrates a general view of an encapsulated medical imaging device in accordance with a preferred embodiment of the present invention. The capsule 1, in this example having a housing 40 of elongated dimensions, comprises two optical setups, each having an axial hemispherical  
25 symmetry and located at either ends of the capsule. The capsule housing 40 is provided with arms 42 having flat feet 4 substantially covering cavities 44 in which the foldable arms are housed (see also Figures 2a and 2b and the corresponding description in this specification for the use and operation of these arms). Each end of the capsule is provided with a front lens 2, for

viewing objects in front of that end, light emitting diodes (LED) 3 for illuminating a sector in close proximity of the capsule (at least covering the whole range of the optical focused field of view of the optical components of the device), and an array of microlenses 9 made up of a multiple rows of microlenses (depicted in these Figures, for the sake of simplicity, are only four rows 5, 6, 7, and 8, but in reality a much larger number of rows of microlenses is employed). The optical set-up is described in detail with reference to Figures 3a, 3b, 4a and 4b). For example, microlens arrays are commercially available from MEMS Optical Inc (Huntsville, Alabama, USA).

10 The LED diodes 3 may optionally be sources of light in different frequencies, for example omitting light in the RGB ranges (i.e. one omitting red, another omitting green and yet another omitting blue light). This is to allow scanning in different monochromatic illumination by turning on separately and sequentially each LED color and then combining the different  
15 mono-chromatic gray-scale images into one color image by the processing means of the system.

An optional wiper 97 is provided comprising a wiping arm traveling over the microlens array, bound by tracks 99, so as to cover the entire microlens array, and wipe dirt off the lenses.

20 Further optional feature is a sensor 98 for sensing medical parameters such as local temperature, pressure or other parameters that communicates with the electronic control of the capsule and thus capable of transmitting the sensed data to an external receiver.

Figure 2a illustrates the encapsulated medical imaging device of the  
25 present invention provided with arms, shown in semi-retracted state as it travels through a small intestine. The arms 42 of the device are provided so as to provide support for the device against the intestine wall 34 as the arms' feet 4 lean against the wall, and prevent the device from flopping over or turning sideways. The arms may be resilient or mechanically foldable and  
30 deployable so as to apply slight counter-force onto the intestine wall and

enhance its supporting ability. The arms may alternatively or complementarily be sampling means, for sampling tissue or matter from the intestine wall. In the latter case, the arms are each adapted to be operated separately (via controlling means) and adapted to be able to be retracted into its corresponding cavity 44 so as to keep the sample inside the cavity once it is retrieved.

Figure 2b depicts the encapsulated medical imaging device of Fig. 2a with its support arms deployed as it travels through a large intestine. As the large intestine 36 is wider the arms may employ fully and reach to the intestine wall so as to prevent disorientation of the capsule.

In another preferred embodiment of the present invention, feet 4 may be as large as the entire housing, or substantial portions of it, thus providing larger contact surface with the intestinal wall.

Figure 3a is a see-through view of a preferred embodiment of the encapsulated medical imaging device of the present invention. Microlens array 9 focuses light reflected from image outside the capsule. It is noted that each microlens may see different view, as some face certain sector and others face other sectors. An optical array is provided inside the capsule, typically comprising an array of light-sensitive receiving cells 12. As the embodiment shown in the figures has twin optical set-up, aimed at providing two counter-directional viewing ability, two optical arrays are provided, positioned back to back so that each faces one end of the device, located in the focal plane of the corresponding optical set-up. The complete image imprinted on the optical array is a result of aggregation of images obtained by each microlens. The optical array is sampled for data by corresponding electronic circuitry 11, which samples in a predetermined manner rows or columns or any other predetermined arrangement, and convert the analog data to digital data. The device is in fact scanning the image in scanning technology.

Optionally it may be required to place appropriate correction optical lenses 52, 54 between each optical array and its corresponding optical set-up. Electronic control units 10, 11 are each electrically communicating with the optical arrays, as well as controlling the light diodes 3, and powering them.

5 The control unit is adapted to generate transmission of data obtained by the optical array to an external receiver.

It is possible to provide the device with internal power source, such as a battery, or provide inductive circuitry (see for example US 4,278,077 to Mitsumoto) that is powered by induction from an external inductive source.

10 Figure 3b depicts the optical scheme of the device of Fig. 3a. Each microlens of microlens array 9 views a small sector of the hemispherical surroundings of the device, and is focused via the optical lenses to an appropriate corresponding cell of the optical array. Front and back images are focused through the front and back lenses 2 onto central area 78 of the optical array, whereas the peripheral image obtained by coronal microlens array 9 is  
15 focused onto an outer annular strip portion 76. Identically, the image obtained by the optics of the other end of the capsule is focused on central area 74 and peripheral area 72 of the optical array.

It is stipulated that if the curvature of the microlens array 9 corresponds  
20 to the curvature of the front lens 2, than a continuous image of the objects viewed outside the capsule may be obtained. Alternatively two separate images may be displayed on an external monitor – one of the view from the front lens and one of the peripheral view viewed by the microlens array. A combined image may also be constructed. In a preferred embodiment of the  
25 present invention, all image manipulation is carried out by an external processing unit (as described hereafter).

Figure 4a illustrates a single stretched row of the microlens array of the device of Fig. 3a. In a preferred embodiment of the present invention the microlens array comprises a plurality of microlenses 22, arranged in a  
30 sequential manner with lenses having different focal distance distributed in

that row. The different foci lenses are arranged so that for a particular angle of view there exist all types of the various microlens lens, and each lens is focused on a corresponding cell of the light receiving array of cells (such as photoelectric cells). A first group of lenses is focused on an imaginary plane  
5 60 located at a first predetermined distance from the array. A second group of lenses is focused on an imaginary plane 62 located at a second predetermined distance from the array, closer than plane 60. A third group of lenses is focused on an imaginary plane 64 located at a third predetermined distance from the array closer still. This way the microlens array has three  
10 focus planes and not only one.

The virtue of this feature can be appreciated by referring to Figure 4b, illustrating fields of view of an encapsulated medical imaging device in accordance to the present invention as it travels through an intestine.

As the capsule arrives (position 1a) some portions of the intestine walls  
15 39 are hidden as a protrusion 37 blocks its field of view. In fact the inside walls of the intestine are very irregular. Chyme (mixed food and digestive juices) is pushed through the small intestine through muscular contractions. During these contractions the chyme, having the consistency of runny applesauce, is squished into the lining of the wall of the small intestine. Nutrients are  
20 absorbed via osmosis by the blood vessels in the mesentery and absorbed through osmosis by the blood vessels attached to the outside of the small intestine. The lining of the intestine is hilly so as to present large surface area for that osmosis to take place. However when the capsule crosses over to position 1b its rear optics allows viewing that hidden area and thus the  
25 limitations of the prior art devices concerning their field of view is greatly reduced.

It is clearly seen that the capsule may be positioned in different distances 31, 33, 29, 51) from the intestine wall lining. If an inspected object is located at a certain distance 31 that equals to the focal distance of one of the  
30 microlens groups, than its best available image will be acquired from that lens



(in fact from a plurality of close lenses from that same group). The control unit of the device or the external monitoring means which receive the transmission is preferably provided with image processing software adapted to identify only focused images and disregard blurred images obtained from the other lens groups. Thus the device is capable of providing clear and focused images of objects at various distances from the device. The processing unit is thus adapted to identify and distinguish focused image data from unfocused one, disregard the unfocused data and acquire image made of focused data only.

Similarly, in another preferred embodiment of the present invention, an alternative optical setup may include multiple multi-focal lenses.

Figures 5a, 5b and 5c illustrate a display monitor communicating with a receiving unit of an encapsulated medical imaging device of the present invention incorporated in a vest 21 worn by a patient. Vest 21 houses the receiving unit adapted to communicate with the capsule and may also include powering means such as inductive circuitry. It engulfs the patients' torso effectively close to the capsule as it travels through the patient's GI tract. The receiving unit in the vest communicates via cable or wirelessly with monitoring unit 139. Monitoring unit 139 provided with display means for displaying one or several images 17, 18, by the encapsulated medical imaging device and/or other data 16.

Figure 6 illustrates the path traveled by a capsule in a patient's small intestine. In another preferred embodiment of the present invention the device incorporates with monitoring means adapted to identify the position and location within the GI tract where an image was acquired by comparing it to a prearranged library of images, and identifying by image processing the type of environment the capsule was in when the image was acquired. It is stipulated that each portion of the GI track (i.e. esophagus, small intestine, large intestine stomach) has unique image (texture, shape, and other distinct features). By identifying the type of environment the device was in when the image was acquired and by knowing some parameters such as the sampling

rate of the device, its traveling velocity within the GI tract (on average it is assumed that it would travel at the rate of 1 to 3 cm per second) it is possible to determine or at least estimate the distance of the path 94 traveled by the capsule from the last identified position 92 to the current location 96, where a pathology was detected and viewed by the capsule. The software may generate a general view of the GI tract, the last image obtained as the device entered into the current type of GI tract and most recent image obtained. A graphic indication on the general image, in the form of a cursor, arrow or any other graphical representation, may be superposed on the GI tract image indicating the device current (or recent) location. This can substantially enhance the medical team's ability to locate the exact position of the pathology found in position 96.

Figure 7 illustrates an optional schematic configuration of the electronic system of an encapsulated medical imaging device in accordance with a preferred embodiment of the present invention. This is given as an example only. A person skilled in the art could easily provide other electrical configurations that would still be covered by the scope of the present invention.

The capsule 100 generally comprises optics 110 (the lens es and optical array) communicating with a control unit 112 that transmits the digital data obtained from the optical array via communication interface 114 and antenna 116. The capsule is optionally inductively powered by an inductive circuitry 111 energized externally by inductance. A receiver 102 (such as one incorporated in a vest – see Figures 5b and 5c) picks up the data transmitted by an antenna 118 and communicates with a control unit 104. The control unit comprises communication interface 120, control unit 122, processor 124, and display means 126 (such as a monitor). It is optionally also provided with a user interface 128, for inputting commands to the control unit. In a preferred embodiment of the present invention the control unit is programmed or programmable so that physician can adjust the sampling rate of the device (i.e. the frequency of image acquiring), control the foldable arms, choose the

images to be displayed or command the system to perform calculations (such as the distance traveled by the capsule inside the intestine).

5 The advantages of the encapsulated imaging device of the present invention are numerous. The device provides high accessibility to the entire GI tract. The unique optical setup provides better images and a greater range for focused images. Optional sampling arms may be operated in-vivo and obtain samples such as biopsy, blood test or retrieve any other sample from the matter the device comes near to. External energizing prevents the need for internal power source that may be hazardous to the patient if the capsule  
10 disintegrates within the GI tract.

In a preferred embodiment of the present invention the images may be obtained by scanning in RGB light – first scanning in red light, then scanning in green and finally in blue, each time obtaining mono-chromatic gray-scale quality images and incorporating them into a color image by the processing  
15 means of the external unit and presenting the color image on the monitor.

Note that the system described in the specification and figures is mainly designed to obtain black and white images, but these images are remarkably clear and distinct and the anticipated resolution is much greater than that of video images.

20 It should be clear that the description of the embodiments and attached Figures set forth in this specification serves only for a better understanding of the invention, without limiting its scope as covered by the following Claims.

It should also be clear that a person skilled in the art, after reading the present specification could make adjustments or amendments to the attached  
25 Figures and above described embodiments that would still be covered by the following Claims.

## C L A I M S

1. An encapsulated medical imaging system comprising:

a capsule of swallowable proportion comprising:

5 at least one optical setup of a number of optical setups comprising an array of microlenses distributed in axial symmetry on at least a portion of the capsule so that the array of microlenses is capable of receiving light reflected from object located in at least a sector outside the capsule;

10 corresponding optical array comprising an array of light sensitive cells optically communicating with said optical setup through focusing means, such that the image of the object is focused on the array of light sensitive cells;

15 electronic circuitry adapted to sample image data obtained by the optical array by scanning the image and converting the image data to digital data;

illuminating means for illuminating a sector in front the optical setup, outside the capsule;

20 transmitting means communicating with said electronic circuitry, adapted to receive image digital data and transmit it to an external receiver;

receiving means for receiving data transmitted from said capsule;

image processing means for processing the data received by the receiving means and; and

display means for displaying an image.

25

2. The system as claimed in Claim 1, wherein the number of the optical setups comprises two optical setups, arranged in opposite sides of the capsule, so as to allow counter-directional viewing.
3. The system as claimed in Claim 1, wherein it is provided with at least one lens of a number of lenses for central view and wherein the array of  
5 microlenses is arranged in a coronal arrangement with respect to the lens, so as to provide peripheral view.
4. The system as claimed in Claim 3, wherein the number of lenses comprises two lenses.
- 10 5. The system as claimed in Claim 1 wherein the microlens array comprises a plurality of microlenses having different foci distributed in a known distribution, and wherein the processing means is adapted to identify and distinguish focused image data from unfocused one, disregard the unfocused data and acquire image made of focused data only.
- 15 6. The system as claimed in Claim 1, wherein the illumination means comprises light emitting diodes.
7. The system as claimed in Claim 6, wherein the light emitting diodes illuminate light in different frequency ranges.
8. The system as claimed in Claim 7, wherein the light emitting diodes  
20 emit red, green or blue light.
9. The system as claimed in claim 8, wherein the light emitting diodes are operated so as to sequentially illuminate red green and blue light.
10. The system as claimed in Claim 1, wherein the capsule is about 12-20 mm in length and about 5-7 mm in diameter.
- 25 11. The system as claimed in claim 1, wherein the capsule housing is made from a biocompatible material.

12. The system as claimed in Claim 1, wherein the capsule housing is made from a dissolvable material.

13. The system as claimed in Claim 12, wherein the capsule housing is made from a dissolvable material that is durable enough so that it may pass  
5 an entire GI tract without disintegrating during the estimated period of time it would normally take for the capsule to pass through.

14. The system as claimed in Claim 1, wherein the capsule is internally powered.

15. The system as claimed in Claim 1, wherein the capsule is externally  
10 powered.

16. The system as claimed in Claim 15, wherein the capsule is inductively powered.

17. The system as claimed in Claim 16, wherein the capsule is further provided with supporting means for supporting the capsule and preventing its  
15 turning over or around.

18. The system as claimed in Claim 17, wherein said supporting means comprise extractable surfaces.

19. The system as claimed in Claim 17, wherein the extractable surfaces are supported by arms.

20. 20. The system as claimed in Claim 19, wherein said arms are resilient.

21. The system as claimed in Claim 19, wherein said arms are mechanically foldable.

22. The system as claimed in Claim 19, wherein the arms are adapted to be housed in cavities provided in the housing of the capsule.

25 23. The system as claimed in Claim 22, wherein the cavities are adapted to hold samples obtained by the arms.

24. The system as claimed in Claim 1, wherein the capsule is further provided with a medical parameter sensor.

25. The system as claimed in Claim 24, wherein the sensor comprises a temperature sensor or a pressure sensor.

5 26. The system as claimed in Claim 1, wherein the capsule is further provided with wiping means for wiping dirt off the optical setup.

27. The system as claimed in Claim 26, wherein the wiping means comprises a wiping arm.

28. An encapsulated medical imaging system comprising:

10 a capsule of swallowable proportion comprising:

at least one optical setup of a number of optical setups comprising an array of multi-focal lenses distributed in axial symmetry on at least a portion of the capsule so that the array of multi-focal lenses is capable of receiving light reflected from object located in at least a sector outside the capsule;

15

corresponding optical array comprising an array of light sensitive cells optically communicating with said optical setup through focusing means, such that the image of the object is focused on the array of light sensitive cells;

20 electronic circuitry adapted to sample image data obtained by the optical array by scanning the image and converting the image data to digital data;

illuminating means for illuminating a sector in front the optical setup, outside the capsule;

transmitting means communicating with said electronic circuitry, adapted to receive image digital data and transmit it to an external receiver;

receiving means for receiving data transmitted from said capsule;

5 image processing means for processing the data received by the receiving means and; and

display means for displaying an image.



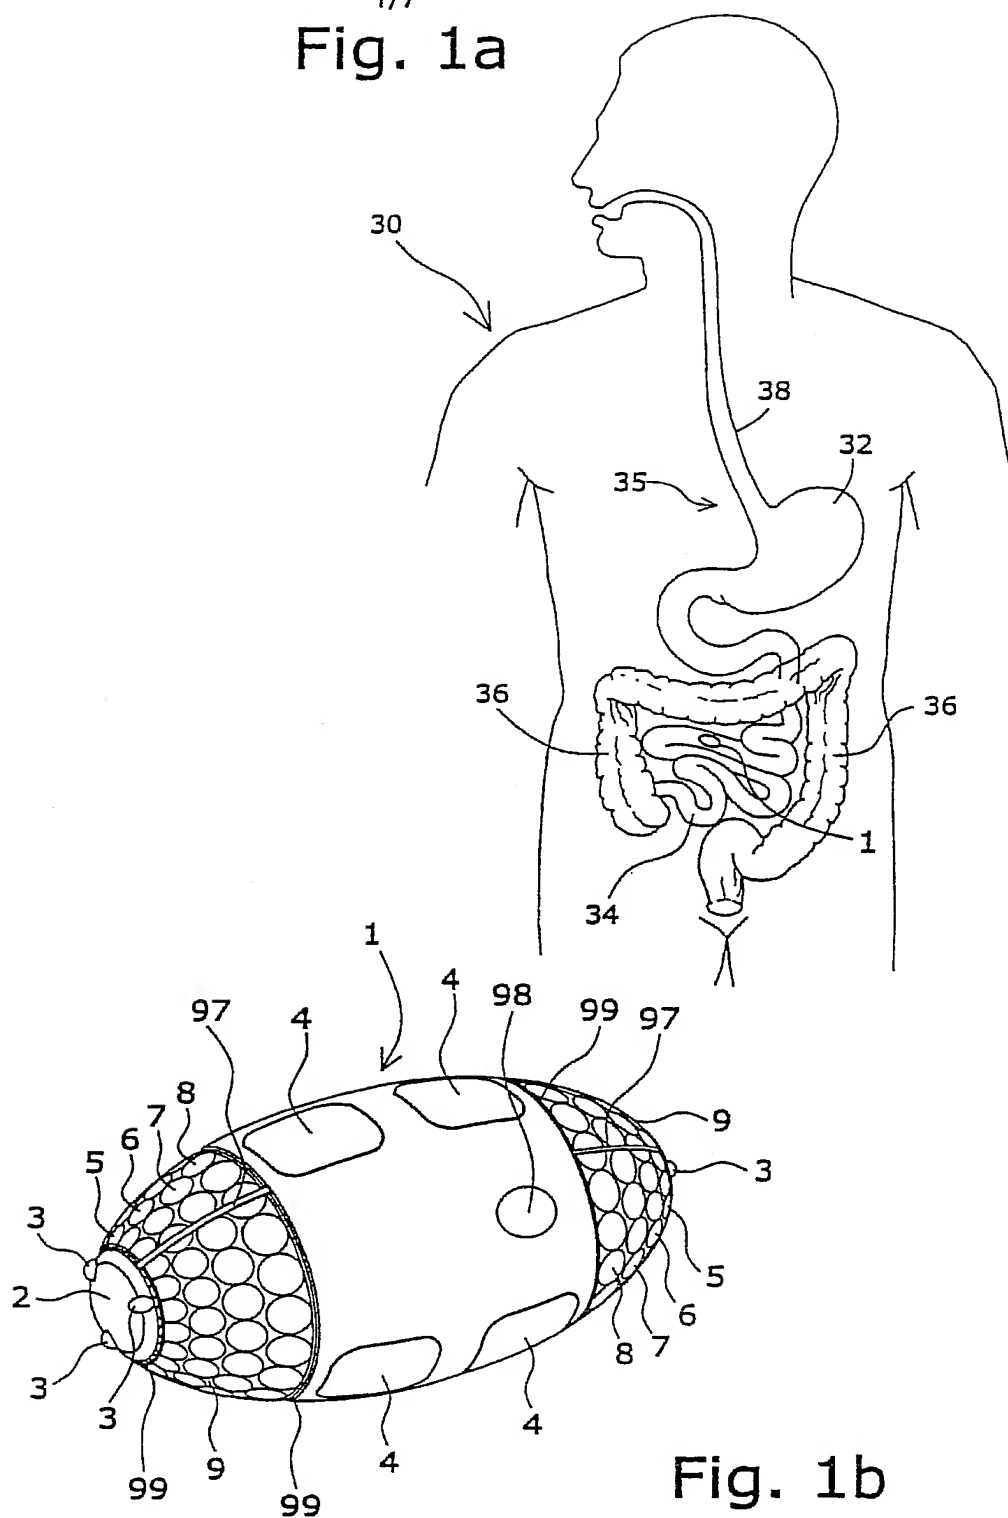
1/7  
Fig. 1a

Fig. 1b

2/7

Fig. 2a

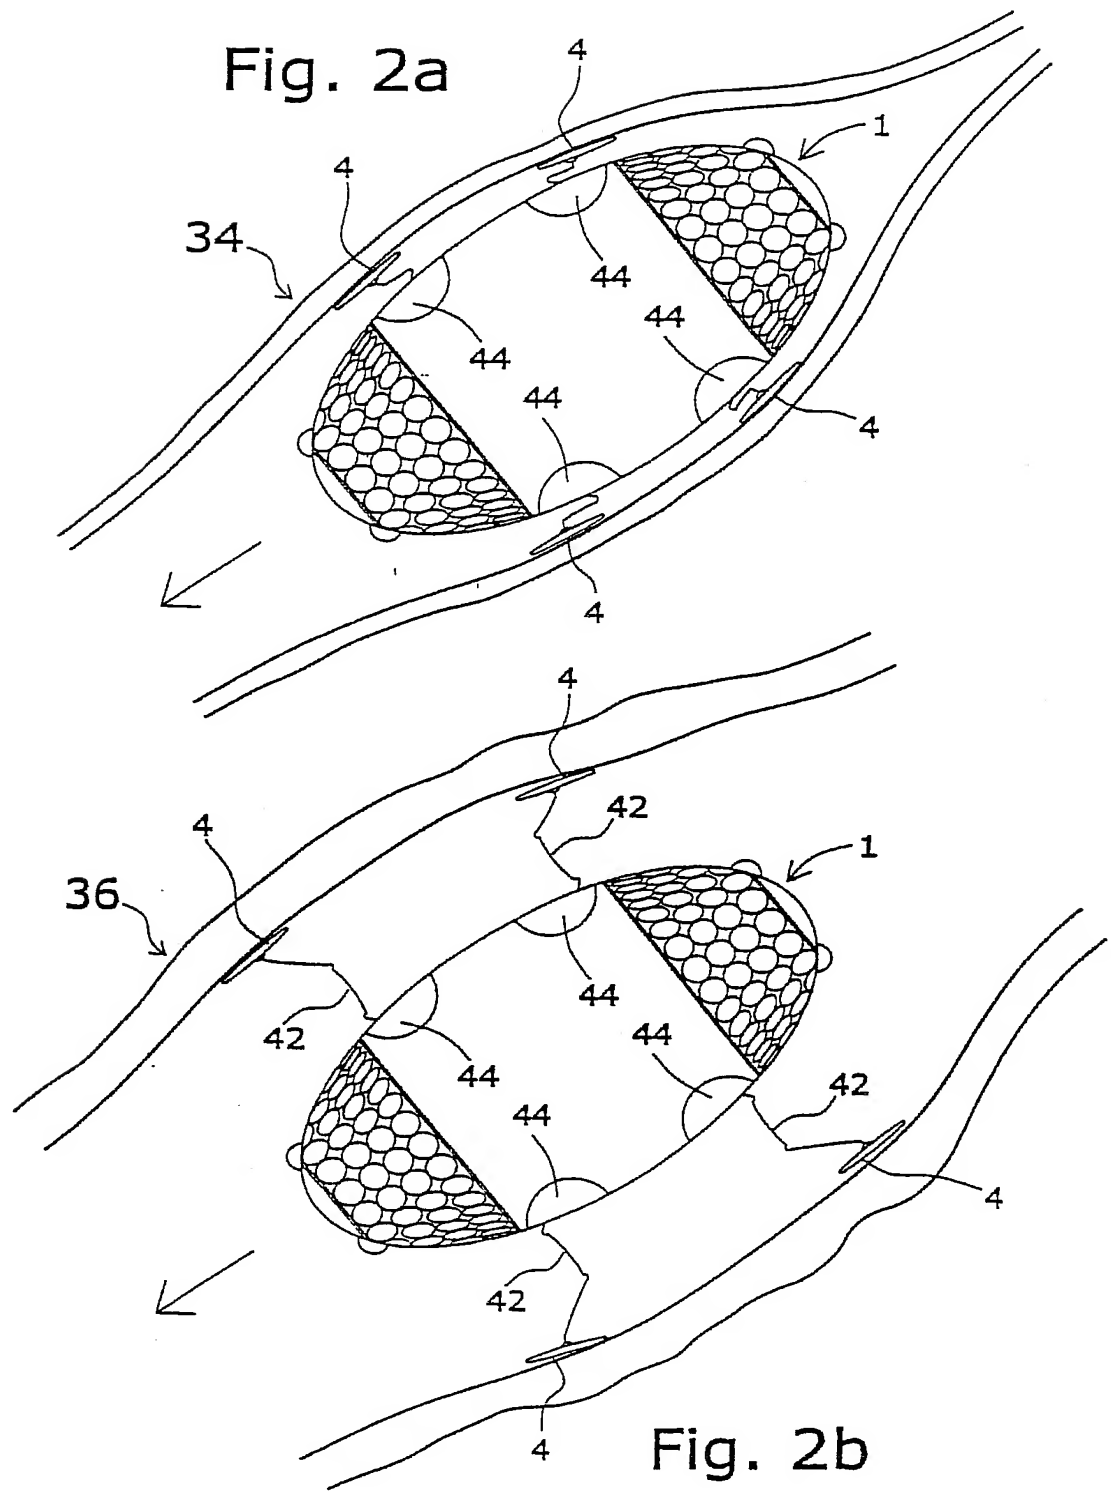


Fig. 2b

Fig. 3a

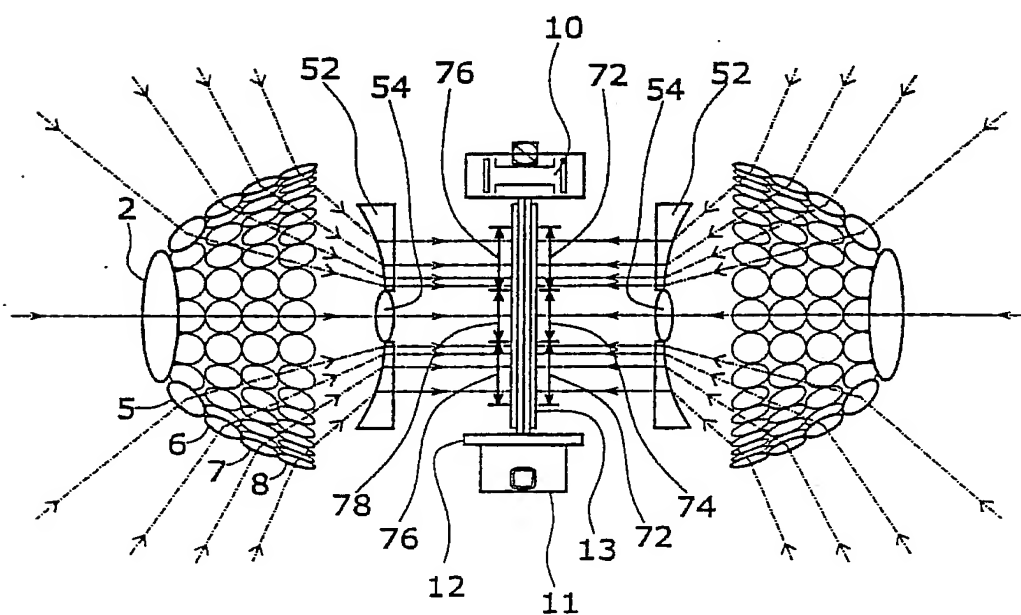
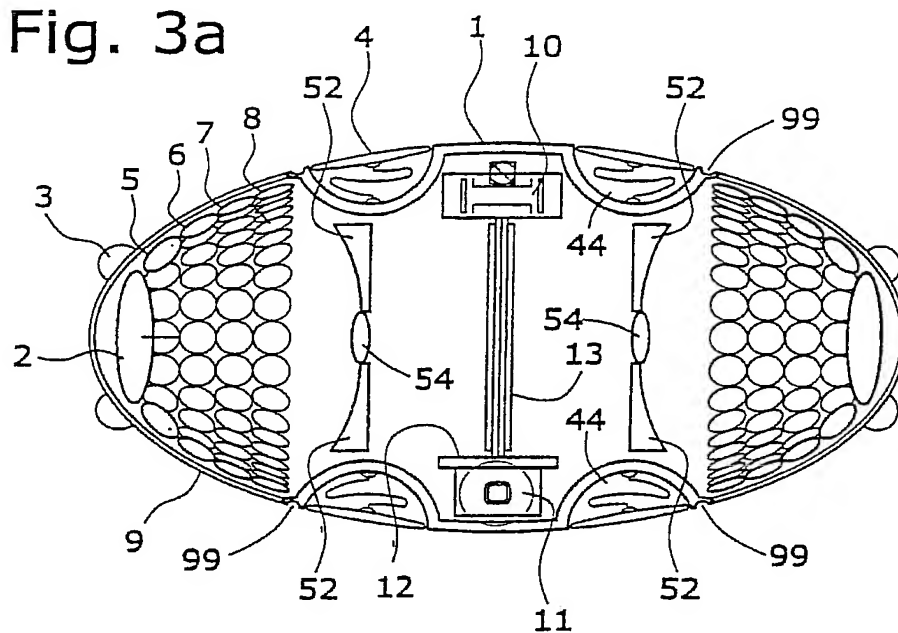


Fig. 3b

4/7

Fig. 4a

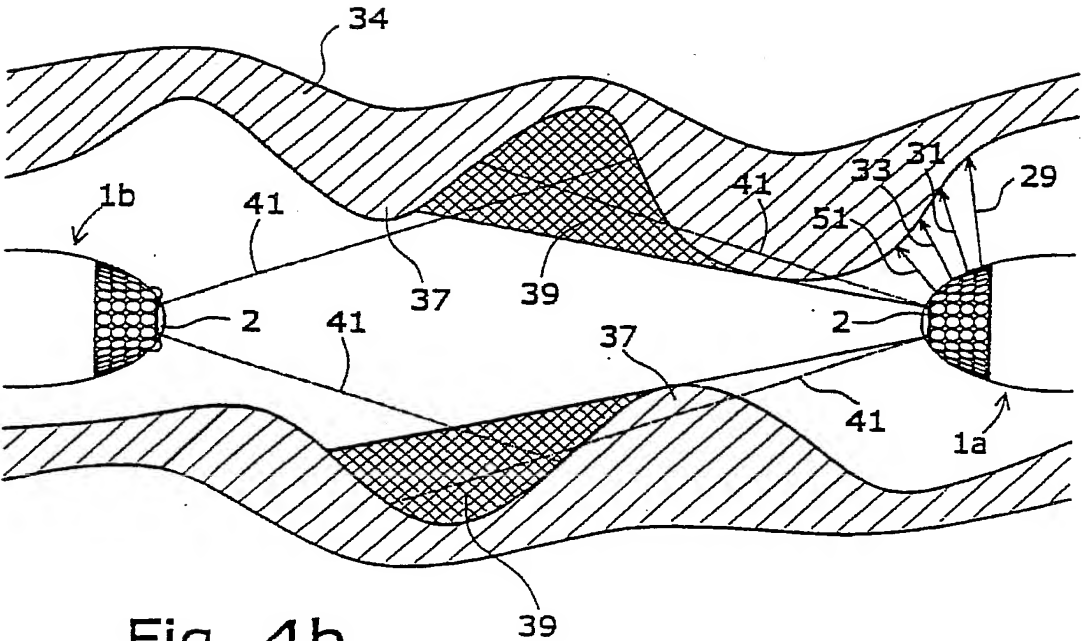
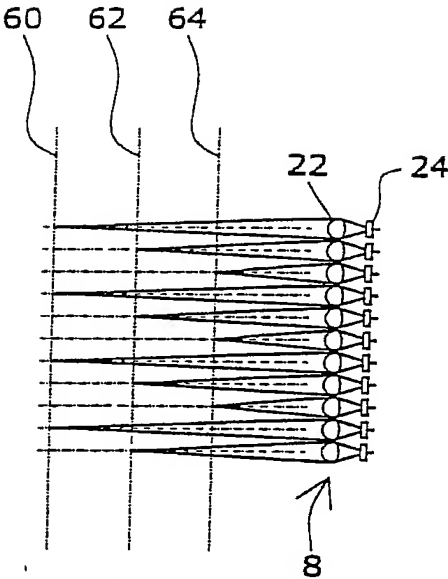


Fig. 4b

5/7

Fig. 5a

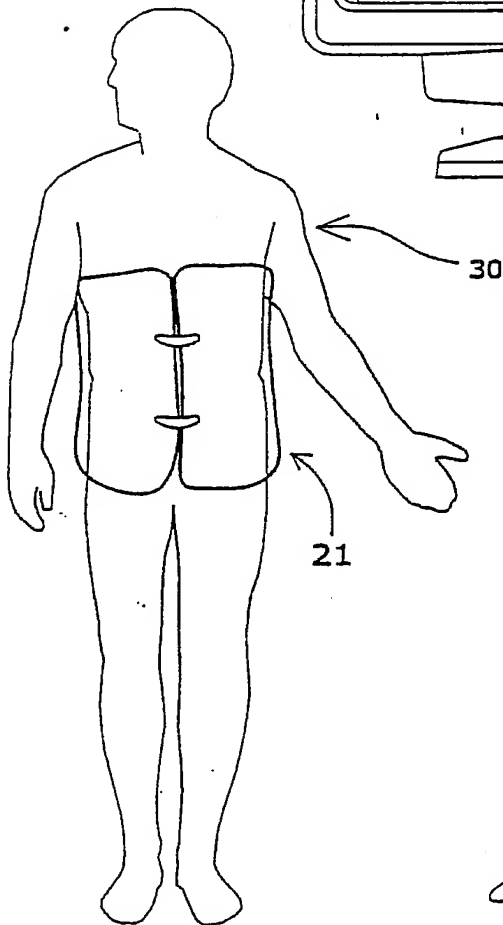
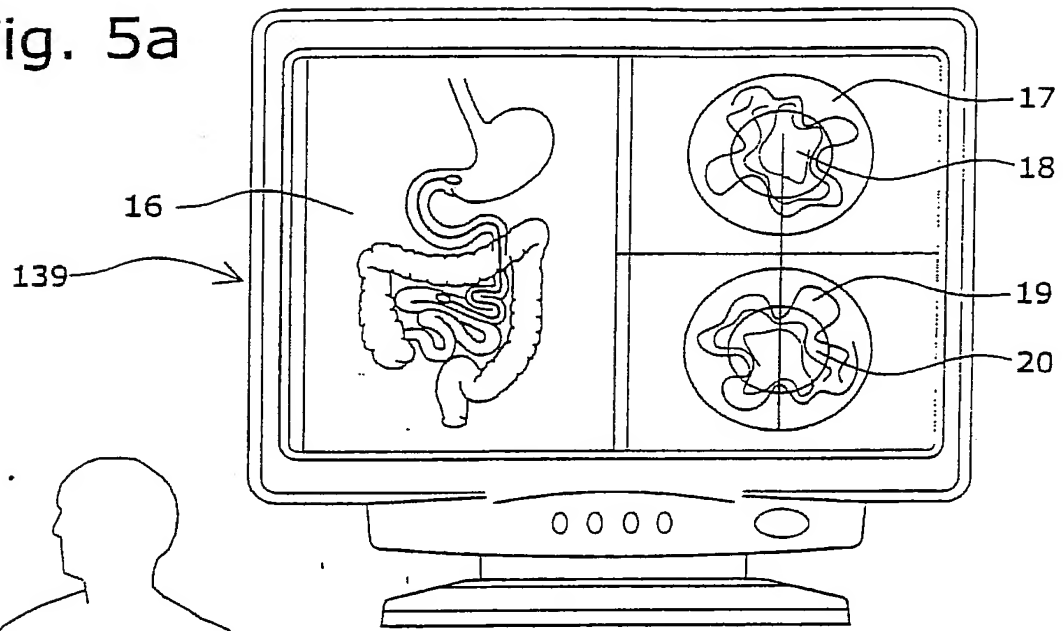


Fig. 5b


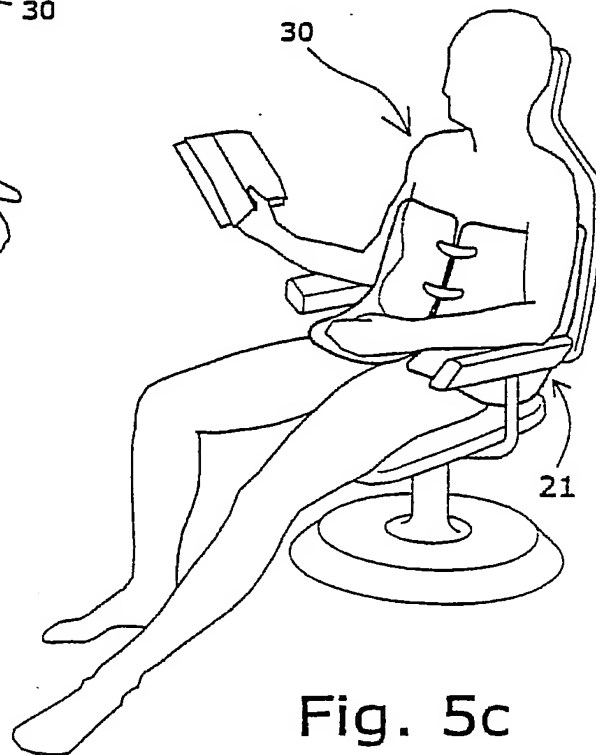


Fig. 5c

Fig. 6

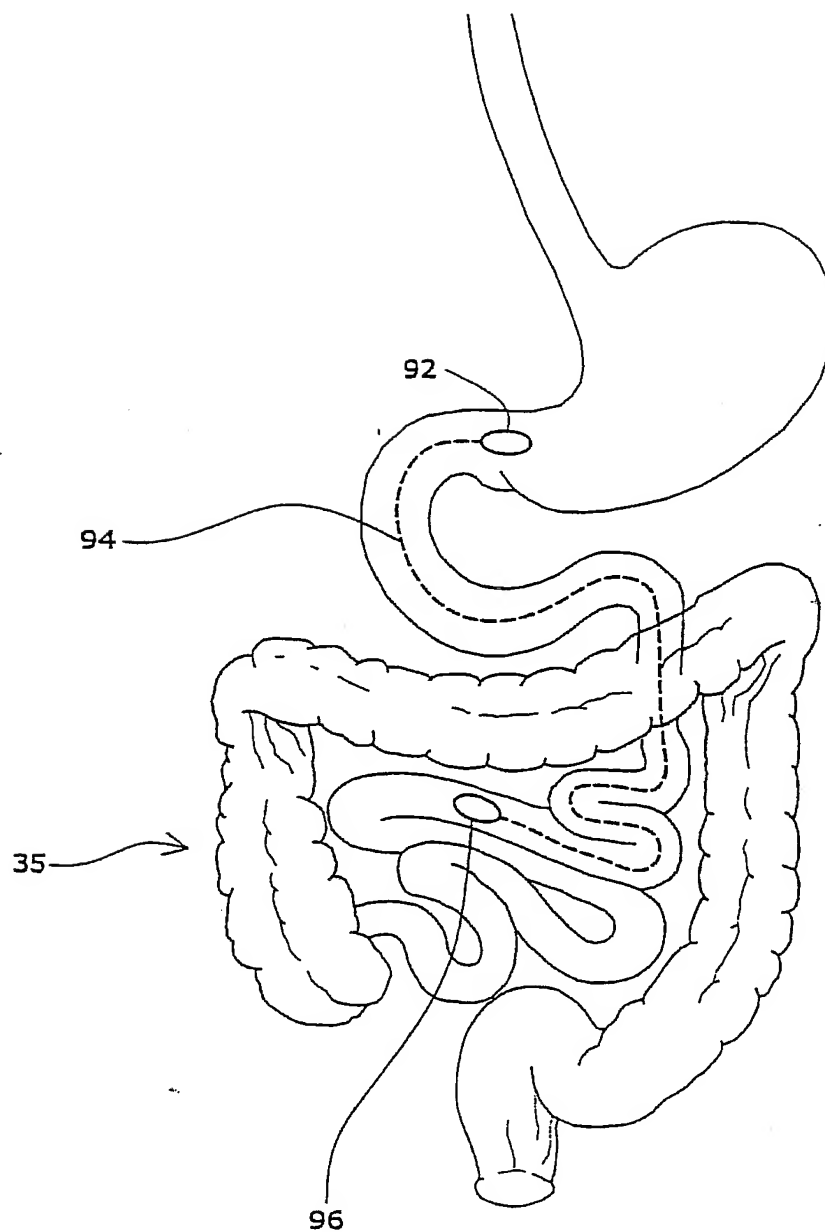

7/7

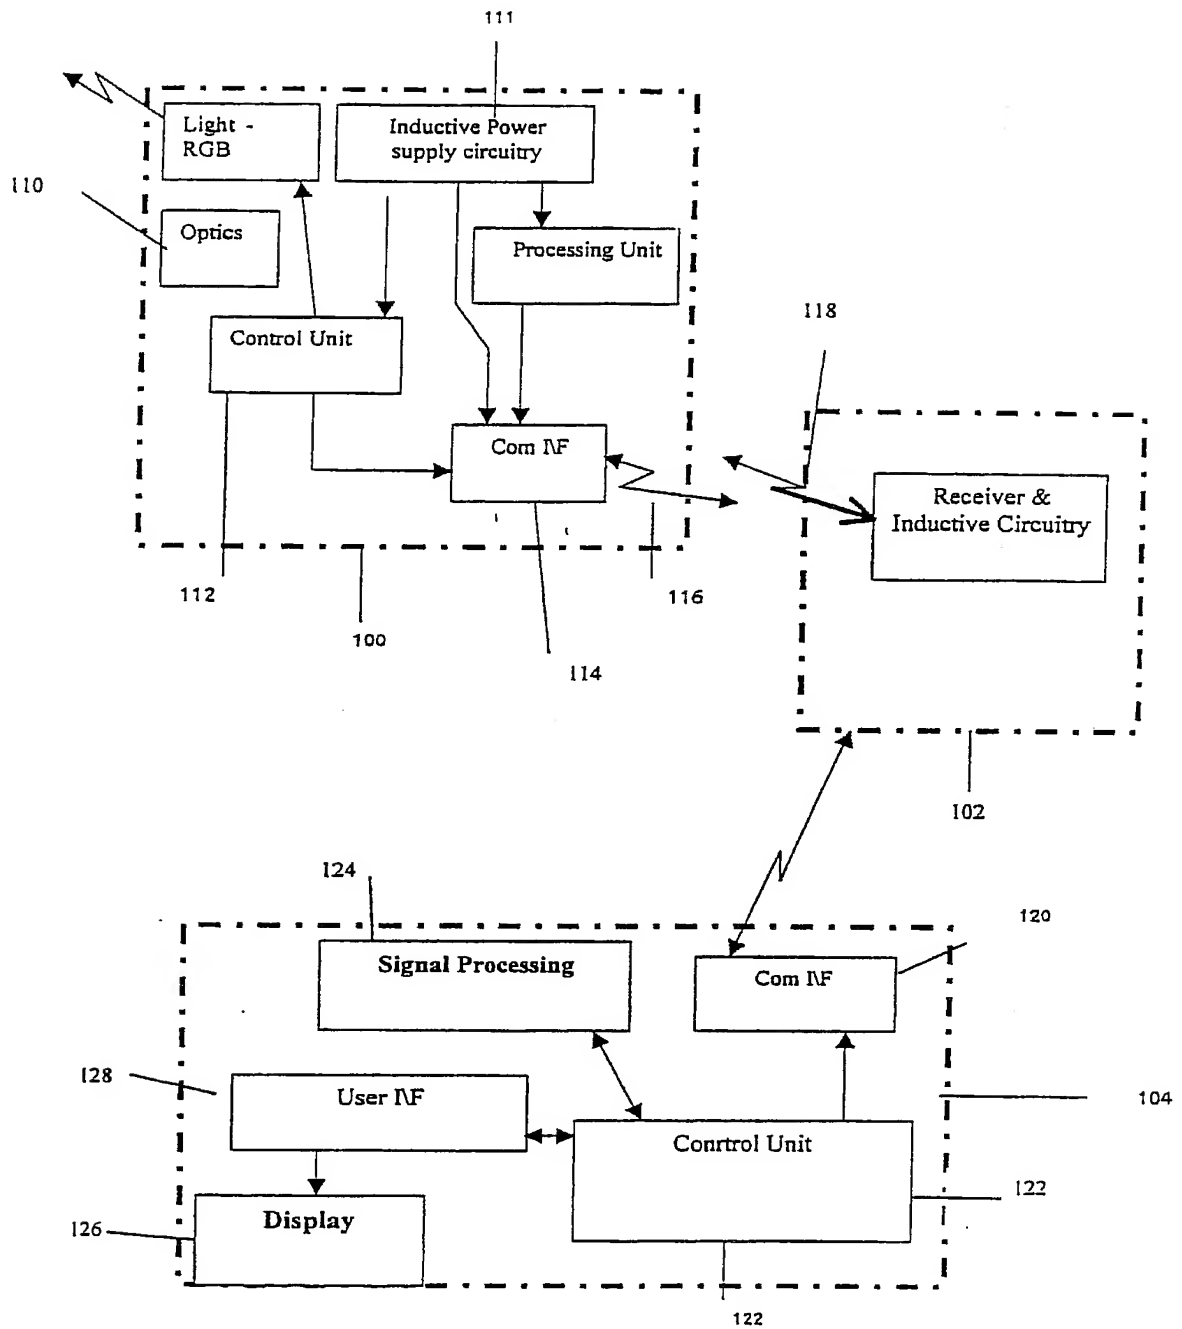


FIG 7